




COMMERCIAL & INDUSTRIAL HVAC EQUIPMENT

# TAH Series - Indirect Fired


## Dimensional Equipment Drawings

- 100% Outside Air Make-Up
- Air Recirculation


### 100% Outside Air Make-Up — Configurations \*Service Side Shown

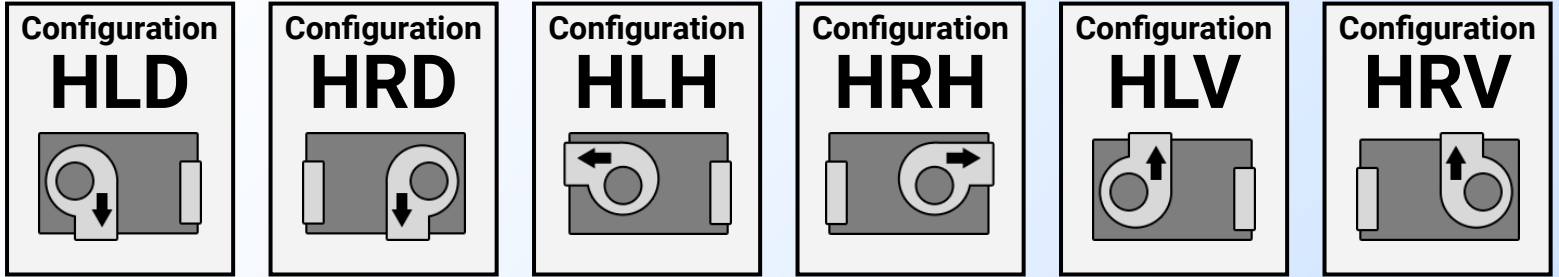

### Air Recirculation — Configurations

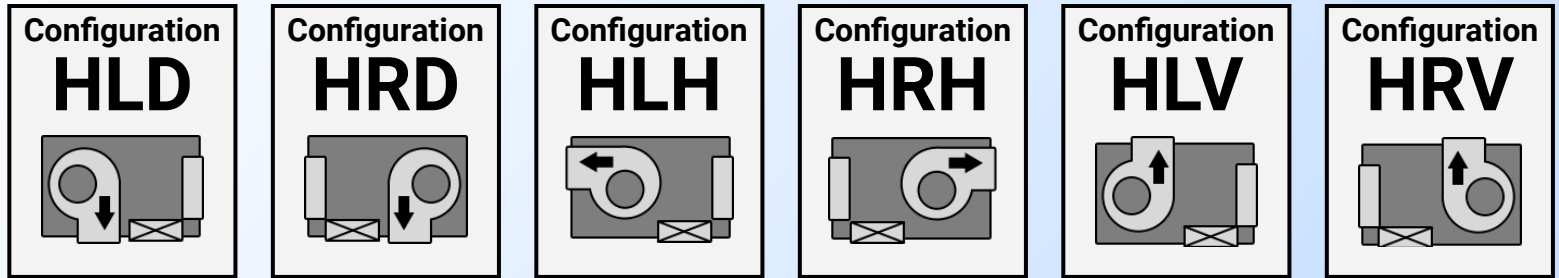

### Contact Titan for Vertical Orientation Dimensional Drawings

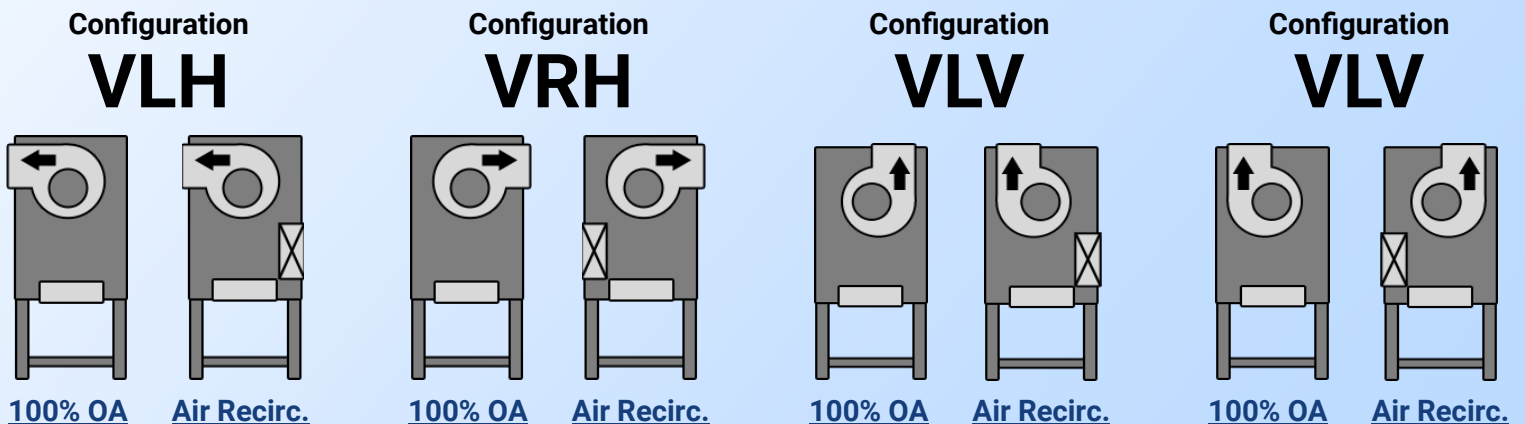

Ver:  
2-20-22




# TAH-ID HLD

[Back to Index](#)

Indirect Fired | 100% Outside Air | MUA

## UNIT COMPONENTS

- |                                   |                                     |  |
|-----------------------------------|-------------------------------------|--|
| 1) INDIRECT-FIRED BURNER          | 5) ACCESS DOOR   ELECTRIC/GAS TRAIN | 9) DISCHARGE                           |
| 2) DWDI FORWARD CURVED BLOWER     | 6) ACCESS DOOR   BLOWER/MOTOR       | 10) TYPICAL DISCONNECT LOCATION        |
| 3) MOTOR AND DRIVES               | 7) TYPICAL GAS INLET LOCATION       | 11) REAR ACCESS DOOR   INDIRECT BURNER |
| 4) VESTIBULE   ELECTRIC/GAS TRAIN | 8) INTAKE                           | 12) ACCESS DOOR   FILTERS              |

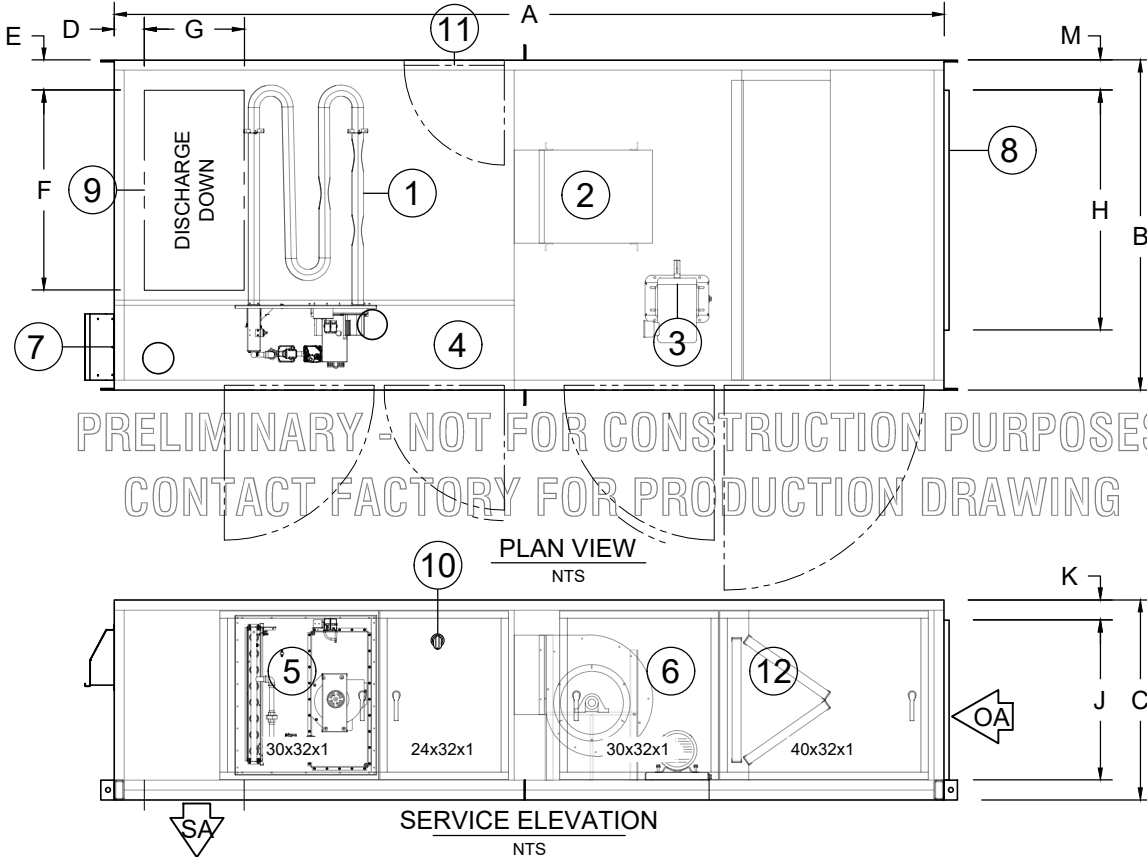

| MODEL      | CFM            | BTU/HR OUTPUT | EST. WEIGHT | A   | B  | C  | D | E | F  | G  | H  | J  | K | M  |
|------------|----------------|---------------|-------------|-----|----|----|---|---|----|----|----|----|---|----|
| TAH-ID0200 | 1,450 - 3,000  | 160,000       | 2200 LBS.   | 140 | 66 | 32 | 6 | 6 | 40 | 16 | 40 | 20 | 4 | 10 |
| TAH-ID0250 | 1,800 - 3,000  | 200,000       | 2200 LBS.   | 140 | 66 | 32 | 6 | 6 | 40 | 16 | 40 | 20 | 4 | 10 |
| TAH-ID0300 | 2,200 - 7,500  | 240,000       | 2650 LBS.   | 150 | 66 | 40 | 6 | 6 | 40 | 20 | 48 | 32 | 4 | 10 |
| TAH-ID0350 | 2,500 - 7,500  | 280,000       | 2650 LBS.   | 150 | 66 | 40 | 6 | 6 | 40 | 20 | 48 | 32 | 4 | 10 |
| TAH-ID0400 | 2,900 - 7,500  | 320,000       | 2650 LBS.   | 150 | 66 | 40 | 6 | 6 | 40 | 20 | 48 | 32 | 4 | 10 |
| TAH-ID0500 | 3,600 - 8,000  | 400,000       | 3190 LBS.   | 178 | 66 | 40 | 6 | 6 | 40 | 20 | 48 | 32 | 4 | 10 |
| TAH-ID0550 | 4,000 - 8,000  | 440,000       | 3190 LBS.   | 178 | 66 | 40 | 6 | 6 | 40 | 20 | 48 | 32 | 4 | 10 |
| TAH-ID0600 | 4,300 - 8,000  | 480,000       | 3190 LBS.   | 178 | 66 | 40 | 6 | 6 | 40 | 20 | 48 | 32 | 4 | 10 |
| TAH-ID0650 | 4,700 - 8,000  | 520,000       | 3190 LBS.   | 178 | 66 | 40 | 6 | 6 | 40 | 20 | 48 | 32 | 4 | 10 |
| TAH-ID0700 | 5,000 - 8,000  | 560,000       | 3190 LBS.   | 178 | 66 | 40 | 6 | 6 | 40 | 20 | 48 | 32 | 4 | 10 |
| TAH-ID0800 | 5,6000 - 8,000 | 640,000       | 3190 LBS.   | 178 | 66 | 40 | 6 | 6 | 40 | 20 | 48 | 32 | 4 | 10 |

| *MODELS ABOVE FEATURE IN-SHOT HEAT EXCHANGERS |                 |                       |            | *MODELS BELOW FEATURE DRUM & TUBE HEAT EXCHANGERS |     |    |   |   |     |    |     |    |   |   |
|---|-----------------|-----------------------|------------|---|-----|----|---|---|-----|----|-----|----|---|---|
| TAH-ID0750                                    | 6,000 - 15,000  | 560,000-760,000       | 4610 LBS.  | 154   | 92  | 52 | 6 | 6 | 64  | 24 | 76  | 44 | 4 | 8 |
| TAH-ID1000                                    | 8,000 - 20,000  | 760,000 - 1,000,000   | 5850 LBS.  | 178   | 106 | 60 | 6 | 6 | 72  | 30 | 96  | 44 | 4 | 3 |
| TAH-ID1250                                    | 9,000 - 20,000  | 1,000,000 - 1,240,000 | 5850 LBS.  | 178   | 106 | 60 | 6 | 6 | 72  | 30 | 96  | 44 | 4 | 3 |
| TAH-ID1500                                    | 11,500 - 30,000 | 1,240,000 - 1,500,000 | 7450 LBS.  | 178   | 140 | 58 | 6 | 6 | 102 | 30 | 120 | 44 | 4 | 6 |
| TAH-ID1750                                    | 14,000 - 30,000 | 1,500,000 - 1,800,000 | 7450 LBS.  | 178   | 140 | 58 | 6 | 6 | 102 | 30 | 120 | 44 | 4 | 6 |
| TAH-ID2000                                    | 16,500 - 35,000 | 1,800,000 - 2,000,000 | 9750 LBS.  | 206   | 164 | 64 | 6 | 6 | 114 | 36 | 150 | 52 | 4 | 6 |
| TAH-ID2500                                    | 18,000 - 35,000 | 2,000,000 - 2,400,000 | 10150 LBS. | 206   | 164 | 64 | 6 | 6 | 114 | 36 | 150 | 52 | 4 | 6 |
| TAH-ID3000                                    | 22,000 - 42,000 | 2,400,000 - 3,000,000 | 12400 LBS. | 252   | 164 | 66 | 6 | 6 | 114 | 36 | 150 | 52 | 4 | 6 |
| TAH-ID4000                                    | 28,000 - 52,000 | 3,000,000 - 4,000,000 | 15000 LBS. | 252   | 204 | 68 | 6 | 8 | 140 | 44 | 200 | 52 | 4 | 2 |




# TAH-ID HRD

[Back to Index](#)


Indirect Fired | 100% Outside Air | MUA

## UNIT COMPONENTS

- |                                   |                                     |  |
|-----------------------------------|-------------------------------------|--|
| 1) INDIRECT-FIRED BURNER          | 5) ACCESS DOOR   ELECTRIC/GAS TRAIN | 9) DISCHARGE                           |
| 2) DWDI FORWARD CURVED BLOWER     | 6) ACCESS DOOR   BLOWER/MOTOR       | 10) TYPICAL DISCONNECT LOCATION        |
| 3) MOTOR AND DRIVES               | 7) TYPICAL GAS INLET LOCATION       | 11) REAR ACCESS DOOR   INDIRECT BURNER |
| 4) VESTIBULE   ELECTRIC/GAS TRAIN | 8) INTAKE                           | 12) ACCESS DOOR   FILTERS              |

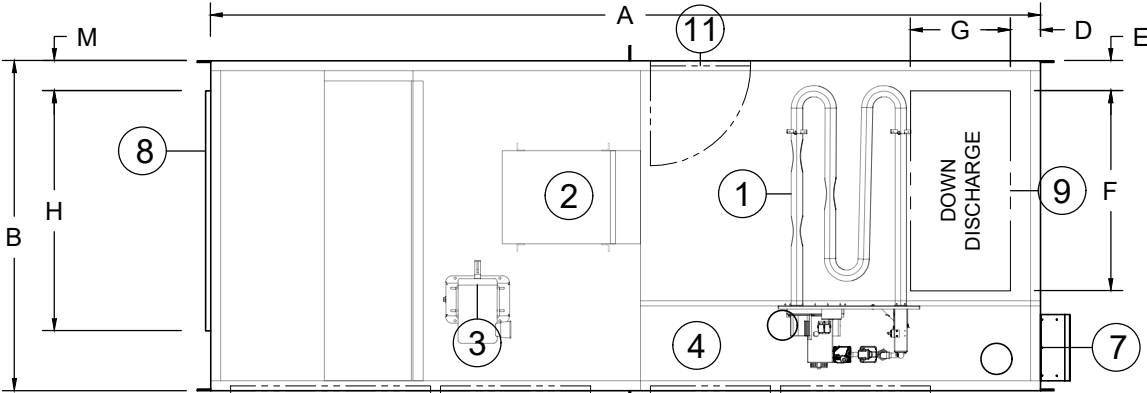

PRELIMINARY - NOT FOR CONSTRUCTION PURPOSES  
CONTACT FACTORY FOR PRODUCTION DRAWING

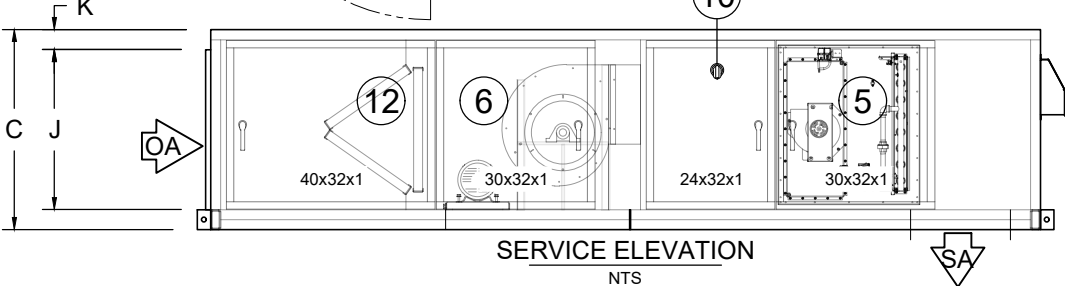

F, G, H & J ARE ACCESSORY DIMENSIONS.  
D, E, K & M ARE ACCESSORY LOCATIONS.  
INTAKE AND DISCHARGE ACCESSORIES MAY  
BE LARGER THAN OPENINGS ON UNIT. ALL  
DIMENSIONS SUBJECT TO MANUFACTURING  
TOLERANCES AND SUBJECT TO CHANGE.  
VERIFY WITH FACTORY BEFORE USING FOR  
ANY CONSTRUCTION PURPOSES.  
INDOOR HANGING UNITS MUST UTILIZE A  
BOTTOM CRADLE (BY OTHERS)

| MODEL   | CFM             | BTU/HR OUTPUT         | EST. WEIGHT | A   | B   | C  | D | E | F   | G  | H   | J  | K | M  |
|---|-----------------|-----------------------|-------------|---|-----|----|---|---|-----|----|-----|----|---|----|
| TAH-ID0200                                    | 1,450 - 3,000   | 160,000               | 2200 LBS.   | 140   | 66  | 32 | 6 | 6 | 40  | 16 | 40  | 20 | 4 | 10 |
| TAH-ID0250                                    | 1,800 - 3,000   | 200,000               | 2200 LBS.   | 140   | 66  | 32 | 6 | 6 | 40  | 16 | 40  | 20 | 4 | 10 |
| TAH-ID0300                                    | 2,200 - 7,500   | 240,000               | 2650 LBS.   | 150   | 66  | 40 | 6 | 6 | 40  | 20 | 48  | 32 | 4 | 10 |
| TAH-ID0350                                    | 2,500 - 7,500   | 280,000               | 2650 LBS.   | 150   | 66  | 40 | 6 | 6 | 40  | 20 | 48  | 32 | 4 | 10 |
| TAH-ID0400                                    | 2,900 - 7,500   | 320,000               | 2650 LBS.   | 150   | 66  | 40 | 6 | 6 | 40  | 20 | 48  | 32 | 4 | 10 |
| TAH-ID0500                                    | 3,600 - 8,000   | 400,000               | 3190 LBS.   | 178   | 66  | 40 | 6 | 6 | 40  | 20 | 48  | 32 | 4 | 10 |
| TAH-ID0550                                    | 4,000 - 8,000   | 440,000               | 3190 LBS.   | 178   | 66  | 40 | 6 | 6 | 40  | 20 | 48  | 32 | 4 | 10 |
| TAH-ID0600                                    | 4,300 - 8,000   | 480,000               | 3190 LBS.   | 178   | 66  | 40 | 6 | 6 | 40  | 20 | 48  | 32 | 4 | 10 |
| TAH-ID0650                                    | 4,700 - 8,000   | 520,000               | 3190 LBS.   | 178   | 66  | 40 | 6 | 6 | 40  | 20 | 48  | 32 | 4 | 10 |
| TAH-ID0700                                    | 5,000 - 8,000   | 560,000               | 3190 LBS.   | 178   | 66  | 40 | 6 | 6 | 40  | 20 | 48  | 32 | 4 | 10 |
| TAH-ID0800                                    | 5,6000 - 8,000  | 640,000               | 3190 LBS.   | 178   | 66  | 40 | 6 | 6 | 40  | 20 | 48  | 32 | 4 | 10 |
| *MODELS ABOVE FEATURE IN-SHOT HEAT EXCHANGERS |                 |                       |             | *MODELS BELOW FEATURE DRUM & TUBE HEAT EXCHANGERS |     |    |   |   |     |    |     |    |   |    |
| TAH-ID0750                                    | 6,000 - 15,000  | 560,000-760,000       | 4610 LBS.   | 154   | 92  | 52 | 6 | 6 | 64  | 24 | 76  | 44 | 4 | 8  |
| TAH-ID1000                                    | 8,000 - 20,000  | 760,000 - 1,000,000   | 5850 LBS.   | 178   | 106 | 60 | 6 | 6 | 72  | 30 | 96  | 44 | 4 | 3  |
| TAH-ID1250                                    | 9,000 - 20,000  | 1,000,000 - 1,240,000 | 5850 LBS.   | 178   | 106 | 60 | 6 | 6 | 72  | 30 | 96  | 44 | 4 | 3  |
| TAH-ID1500                                    | 11,500 - 30,000 | 1,240,000 - 1,500,000 | 7450 LBS.   | 178   | 140 | 58 | 6 | 6 | 102 | 30 | 120 | 44 | 4 | 6  |
| TAH-ID1750                                    | 14,000 - 30,000 | 1,500,000 - 1,800,000 | 7450 LBS.   | 178   | 140 | 58 | 6 | 6 | 102 | 30 | 120 | 44 | 4 | 6  |
| TAH-ID2000                                    | 16,500 - 35,000 | 1,800,000 - 2,000,000 | 9750 LBS.   | 206   | 164 | 64 | 6 | 6 | 114 | 36 | 150 | 52 | 4 | 6  |
| TAH-ID2500                                    | 18,000 - 35,000 | 2,000,000 - 2,400,000 | 10150 LBS.  | 206   | 164 | 64 | 6 | 6 | 114 | 36 | 150 | 52 | 4 | 6  |
| TAH-ID3000                                    | 22,000 - 42,000 | 2,400,000 - 3,000,000 | 12400 LBS.  | 252   | 164 | 66 | 6 | 6 | 114 | 36 | 150 | 52 | 4 | 6  |
| TAH-ID4000                                    | 28,000 - 52,000 | 3,000,000 - 4,000,000 | 15000 LBS.  | 252   | 204 | 68 | 6 | 8 | 140 | 44 | 200 | 52 | 4 | 2  |





# TAH-ID HLH

[Back to Index](#)

Indirect Fired | 100% Outside Air | MUA

### UNIT COMPONENTS

- |                                   |                                     |  |
|-----------------------------------|-------------------------------------|--|
| 1) INDIRECT-FIRED BURNER          | 5) ACCESS DOOR   ELECTRIC/GAS TRAIN | 9) DISCHARGE                           |
| 2) DWDI FORWARD CURVED BLOWER     | 6) ACCESS DOOR   BLOWER/MOTOR       | 10) TYPICAL DISCONNECT LOCATION        |
| 3) MOTOR AND DRIVES               | 7) TYPICAL GAS INLET LOCATION       | 11) REAR ACCESS DOOR   INDIRECT BURNER |
| 4) VESTIBULE   ELECTRIC/GAS TRAIN | 8) INTAKE                           | 12) ACCESS DOOR   FILTERS              |

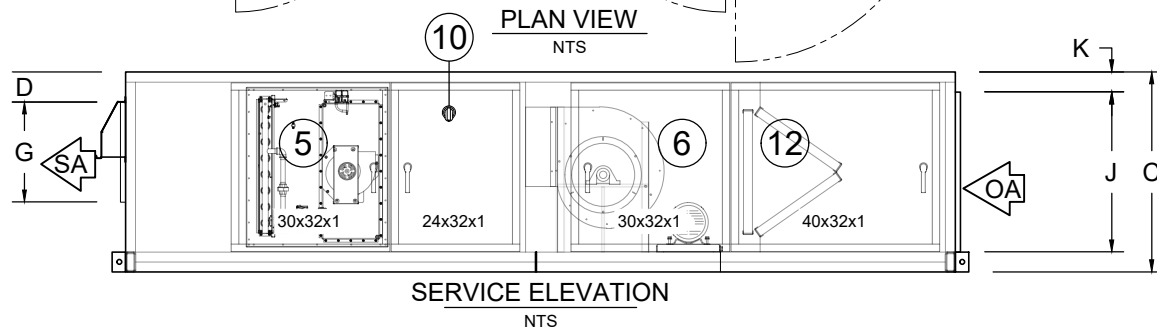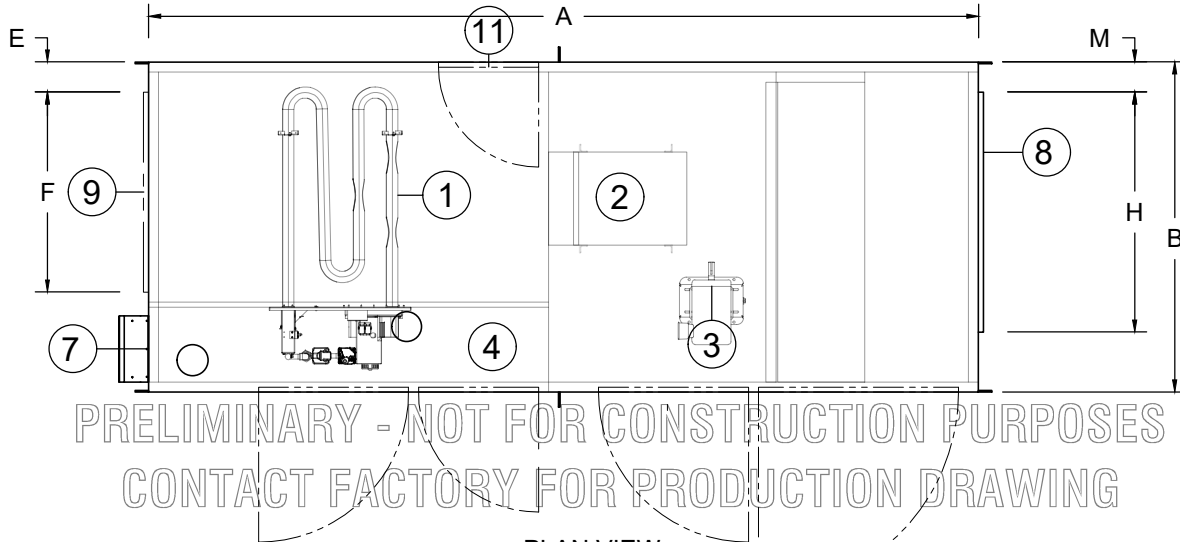

F, G, H & J ARE ACCESSORY DIMENSIONS. D, E, K & M ARE ACCESSORY LOCATIONS. INTAKE AND DISCHARGE ACCESSORIES MAY BE LARGER THAN OPENINGS ON UNIT. ALL DIMENSIONS SUBJECT TO MANUFACTURING TOLERANCES AND SUBJECT TO CHANGE. VERIFY WITH FACTORY BEFORE USING FOR ANY CONSTRUCTION PURPOSES. INDOOR HANGING UNITS MUST UTILIZE A BOTTOM CRADLE (BY OTHERS)

| MODEL      | CFM            | BTU/HR OUTPUT | EST. WEIGHT | A   | B  | C  | D | E | F  | G  | H  | J  | K | M |
|------------|----------------|---------------|-------------|-----|----|----|---|---|----|----|----|----|---|---|
| TAH-ID0200 | 1,450 - 3,000  | 160,000       | 2200 LBS.   | 140 | 66 | 32 | 6 | 6 | 40 | 16 | 40 | 20 | 4 | 6 |
| TAH-ID0250 | 1,800 - 3,000  | 200,000       | 2200 LBS.   | 140 | 66 | 32 | 6 | 6 | 40 | 16 | 40 | 20 | 4 | 6 |
| TAH-ID0300 | 2,200 - 7,500  | 240,000       | 2650 LBS.   | 150 | 66 | 40 | 8 | 6 | 40 | 20 | 48 | 32 | 4 | 6 |
| TAH-ID0350 | 2,500 - 7,500  | 280,000       | 2650 LBS.   | 150 | 66 | 40 | 8 | 6 | 40 | 20 | 48 | 32 | 4 | 6 |
| TAH-ID0400 | 2,900 - 7,500  | 320,000       | 2650 LBS.   | 150 | 66 | 40 | 8 | 6 | 40 | 20 | 48 | 32 | 4 | 6 |
| TAH-ID0500 | 3,600 - 8,000  | 400,000       | 3190 LBS.   | 178 | 66 | 40 | 8 | 6 | 40 | 20 | 48 | 32 | 4 | 6 |
| TAH-ID0550 | 4,000 - 8,000  | 440,000       | 3190 LBS.   | 178 | 66 | 40 | 8 | 6 | 40 | 20 | 48 | 32 | 4 | 6 |
| TAH-ID0600 | 4,300 - 8,000  | 480,000       | 3190 LBS.   | 178 | 66 | 40 | 8 | 6 | 40 | 20 | 48 | 32 | 4 | 6 |
| TAH-ID0650 | 4,700 - 8,000  | 520,000       | 3190 LBS.   | 178 | 66 | 40 | 8 | 6 | 40 | 20 | 48 | 32 | 4 | 6 |
| TAH-ID0700 | 5,000 - 8,000  | 560,000       | 3190 LBS.   | 178 | 66 | 40 | 8 | 6 | 40 | 20 | 48 | 32 | 4 | 6 |
| TAH-ID0800 | 5,6000 - 8,000 | 640,000       | 3190 LBS.   | 178 | 66 | 40 | 8 | 6 | 40 | 20 | 48 | 32 | 4 | 6 |

| *MODELS ABOVE FEATURE IN-SHOT HEAT EXCHANGERS |                 |                       |            | *MODELS BELOW FEATURE DRUM & TUBE HEAT EXCHANGERS |     |    |    |   |     |    |     |    |   |    |
|---|-----------------|-----------------------|------------|---|-----|----|----|---|-----|----|-----|----|---|----|
| TAH-ID0750                                    | 6,000 - 15,000  | 560,000-760,000       | 4610 LBS.  | 154   | 92  | 52 | 12 | 6 | 64  | 24 | 76  | 44 | 4 | 6  |
| TAH-ID1000                                    | 8,000 - 20,000  | 760,000 - 1,000,000   | 5850 LBS.  | 178   | 106 | 60 | 14 | 6 | 72  | 30 | 96  | 44 | 4 | 44 |
| TAH-ID1250                                    | 9,000 - 20,000  | 1,000,000 - 1,240,000 | 5850 LBS.  | 178   | 106 | 60 | 14 | 6 | 72  | 30 | 96  | 44 | 4 | 6  |
| TAH-ID1500                                    | 11,500 - 30,000 | 1,240,000 - 1,500,000 | 7450 LBS.  | 178   | 140 | 58 | 14 | 6 | 102 | 30 | 120 | 44 | 4 | 6  |
| TAH-ID1750                                    | 14,000 - 30,000 | 1,500,000 - 1,800,000 | 7450 LBS.  | 178   | 140 | 58 | 14 | 6 | 102 | 30 | 120 | 44 | 4 | 6  |
| TAH-ID2000                                    | 16,500 - 35,000 | 1,800,000 - 2,000,000 | 9750 LBS.  | 206   | 164 | 64 | 14 | 6 | 114 | 36 | 150 | 52 | 4 | 6  |
| TAH-ID2500                                    | 18,000 - 35,000 | 2,000,000 - 2,400,000 | 10150 LBS. | 206   | 164 | 64 | 14 | 6 | 114 | 36 | 150 | 52 | 4 | 6  |
| TAH-ID3000                                    | 22,000 - 42,000 | 2,400,000 - 3,000,000 | 12400 LBS. | 252   | 164 | 66 | 14 | 6 | 114 | 36 | 150 | 52 | 4 | 6  |
| TAH-ID4000                                    | 28,000 - 52,000 | 3,000,000 - 4,000,000 | 15000 LBS. | 252   | 204 | 68 | 10 | 8 | 140 | 44 | 200 | 52 | 4 | 2  |




# TAH-ID HRH

[Back to Index](#)

Indirect Fired | 100% Outside Air | MUA


**UNIT COMPONENTS**

- 1) INDIRECT-FIRED BURNER
- 2) DWDI FORWARD CURVED BLOWER
- 3) MOTOR AND DRIVES
- 4) VESTIBULE | ELECTRIC/GAS TRAIN
- 5) ACCESS DOOR | ELECTRIC/GAS TRAIN
- 6) ACCESS DOOR | BLOWER/MOTOR
- 7) TYPICAL GAS INLET LOCATION
- 8) INTAKE
- 9) DISCHARGE
- 10) TYPICAL DISCONNECT LOCATION
- 11) REAR ACCESS DOOR | INDIRECT BURNER
- 12) ACCESS DOOR | FILTERS

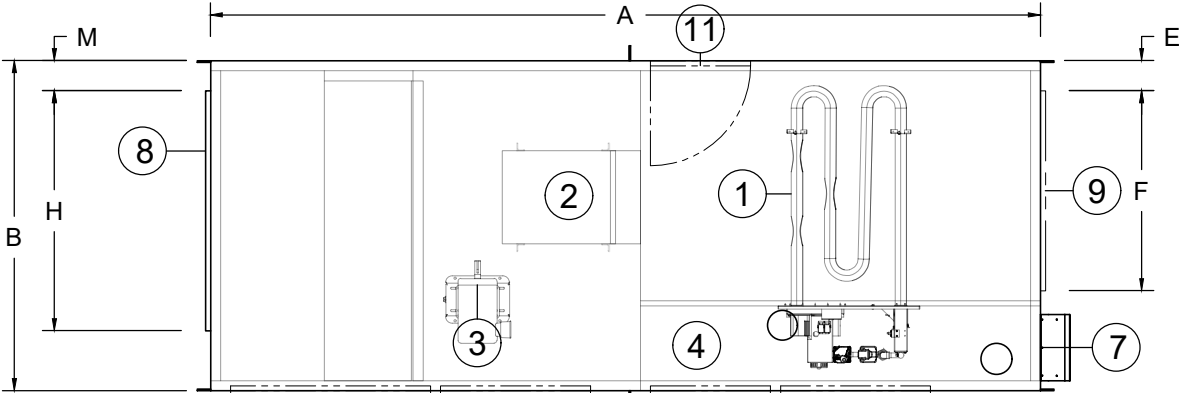

F, G, H & J ARE ACCESSORY DIMENSIONS.  
 D, E, K & M ARE ACCESSORY LOCATIONS.  
 INTAKE AND DISCHARGE ACCESSORIES MAY BE LARGER THAN OPENINGS ON UNIT. ALL DIMENSIONS SUBJECT TO MANUFACTURING TOLERANCES AND SUBJECT TO CHANGE, VERIFY WITH FACTORY BEFORE USING FOR ANY CONSTRUCTION PURPOSES.  
 INDOOR HANGING UNITS MUST UTILIZE A BOTTOM CRADLE (BY OTHERS)

PRELIMINARY - NOT FOR CONSTRUCTION PURPOSES  
 CONTACT FACTORY FOR PRODUCTION DRAWING

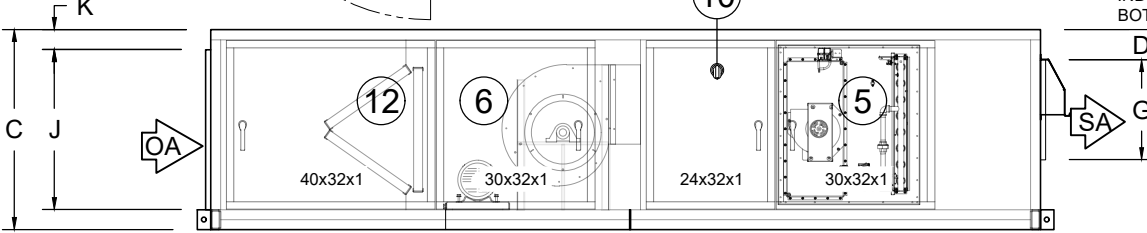

**SERVICE ELEVATION**  
NTS

| MODEL   | CFM             | BTU/HR OUTPUT         | EST. WEIGHT | A   | B   | C  | D  | E | F   | G  | H   | J  | K | M  |
|---|-----------------|-----------------------|-------------|---|-----|----|----|---|-----|----|-----|----|---|----|
| TAH-ID0200                                    | 1,450 - 3,000   | 160,000               | 2200 LBS.   | 140   | 66  | 32 | 6  | 6 | 40  | 16 | 40  | 20 | 4 | 6  |
| TAH-ID0250                                    | 1,800 - 3,000   | 200,000               | 2200 LBS.   | 140   | 66  | 32 | 6  | 6 | 40  | 16 | 40  | 20 | 4 | 6  |
| TAH-ID0300                                    | 2,200 - 7,500   | 240,000               | 2650 LBS.   | 150   | 66  | 40 | 8  | 6 | 40  | 20 | 48  | 32 | 4 | 6  |
| TAH-ID0350                                    | 2,500 - 7,500   | 280,000               | 2650 LBS.   | 150   | 66  | 40 | 8  | 6 | 40  | 20 | 48  | 32 | 4 | 6  |
| TAH-ID0400                                    | 2,900 - 7,500   | 320,000               | 2650 LBS.   | 150   | 66  | 40 | 8  | 6 | 40  | 20 | 48  | 32 | 4 | 6  |
| TAH-ID0500                                    | 3,600 - 8,000   | 400,000               | 3190 LBS.   | 178   | 66  | 40 | 8  | 6 | 40  | 20 | 48  | 32 | 4 | 6  |
| TAH-ID0550                                    | 4,000 - 8,000   | 440,000               | 3190 LBS.   | 178   | 66  | 40 | 8  | 6 | 40  | 20 | 48  | 32 | 4 | 6  |
| TAH-ID0600                                    | 4,300 - 8,000   | 480,000               | 3190 LBS.   | 178   | 66  | 40 | 8  | 6 | 40  | 20 | 48  | 32 | 4 | 6  |
| TAH-ID0650                                    | 4,700 - 8,000   | 520,000               | 3190 LBS.   | 178   | 66  | 40 | 8  | 6 | 40  | 20 | 48  | 32 | 4 | 6  |
| TAH-ID0700                                    | 5,000 - 8,000   | 560,000               | 3190 LBS.   | 178   | 66  | 40 | 8  | 6 | 40  | 20 | 48  | 32 | 4 | 6  |
| TAH-ID0800                                    | 5,6000 - 8,000  | 640,000               | 3190 LBS.   | 178   | 66  | 40 | 8  | 6 | 40  | 20 | 48  | 32 | 4 | 6  |
| *MODELS ABOVE FEATURE IN-SHOT HEAT EXCHANGERS |                 |                       |             | *MODELS BELOW FEATURE DRUM & TUBE HEAT EXCHANGERS |     |    |    |   |     |    |     |    |   |    |
| TAH-ID0750                                    | 6,000 - 15,000  | 560,000-760,000       | 4610 LBS.   | 154   | 92  | 52 | 12 | 6 | 64  | 24 | 76  | 44 | 4 | 6  |
| TAH-ID1000                                    | 8,000 - 20,000  | 760,000 - 1,000,000   | 5850 LBS.   | 178   | 106 | 60 | 14 | 6 | 72  | 30 | 96  | 44 | 4 | 44 |
| TAH-ID1250                                    | 9,000 - 20,000  | 1,000,000 - 1,240,000 | 5850 LBS.   | 178   | 106 | 60 | 14 | 6 | 72  | 30 | 96  | 44 | 4 | 6  |
| TAH-ID1500                                    | 11,500 - 30,000 | 1,240,000 - 1,500,000 | 7450 LBS.   | 178   | 140 | 58 | 14 | 6 | 102 | 30 | 120 | 44 | 4 | 6  |
| TAH-ID1750                                    | 14,000 - 30,000 | 1,500,000 - 1,800,000 | 7450 LBS.   | 178   | 140 | 58 | 14 | 6 | 102 | 30 | 120 | 44 | 4 | 6  |
| TAH-ID2000                                    | 16,500 - 35,000 | 1,800,000 - 2,000,000 | 9750 LBS.   | 206   | 164 | 64 | 14 | 6 | 114 | 36 | 150 | 52 | 4 | 6  |
| TAH-ID2500                                    | 18,000 - 35,000 | 2,000,000 - 2,400,000 | 10150 LBS.  | 206   | 164 | 64 | 14 | 6 | 114 | 36 | 150 | 52 | 4 | 6  |
| TAH-ID3000                                    | 22,000 - 42,000 | 2,400,000 - 3,000,000 | 12400 LBS.  | 252   | 164 | 66 | 14 | 6 | 114 | 36 | 150 | 52 | 4 | 6  |
| TAH-ID4000                                    | 28,000 - 52,000 | 3,000,000 - 4,000,000 | 15000 LBS.  | 252   | 204 | 68 | 10 | 8 | 140 | 44 | 200 | 52 | 4 | 2  |




# TAH-ID HLV

[Back to Index](#)

Indirect Fired | 100% Outside Air | MUA

## UNIT COMPONENTS

- |                                   |                                     |  |
|-----------------------------------|-------------------------------------|--|
| 1) INDIRECT-FIRED BURNER          | 5) ACCESS DOOR   ELECTRIC/GAS TRAIN | 9) DISCHARGE                           |
| 2) DWDI FORWARD CURVED BLOWER     | 6) ACCESS DOOR   BLOWER/MOTOR       | 10) TYPICAL DISCONNECT LOCATION        |
| 3) MOTOR AND DRIVES               | 7) TYPICAL GAS INLET LOCATION       | 11) REAR ACCESS DOOR   INDIRECT BURNER |
| 4) VESTIBULE   ELECTRIC/GAS TRAIN | 8) INTAKE                           | 12) ACCESS DOOR   FILTERS              |

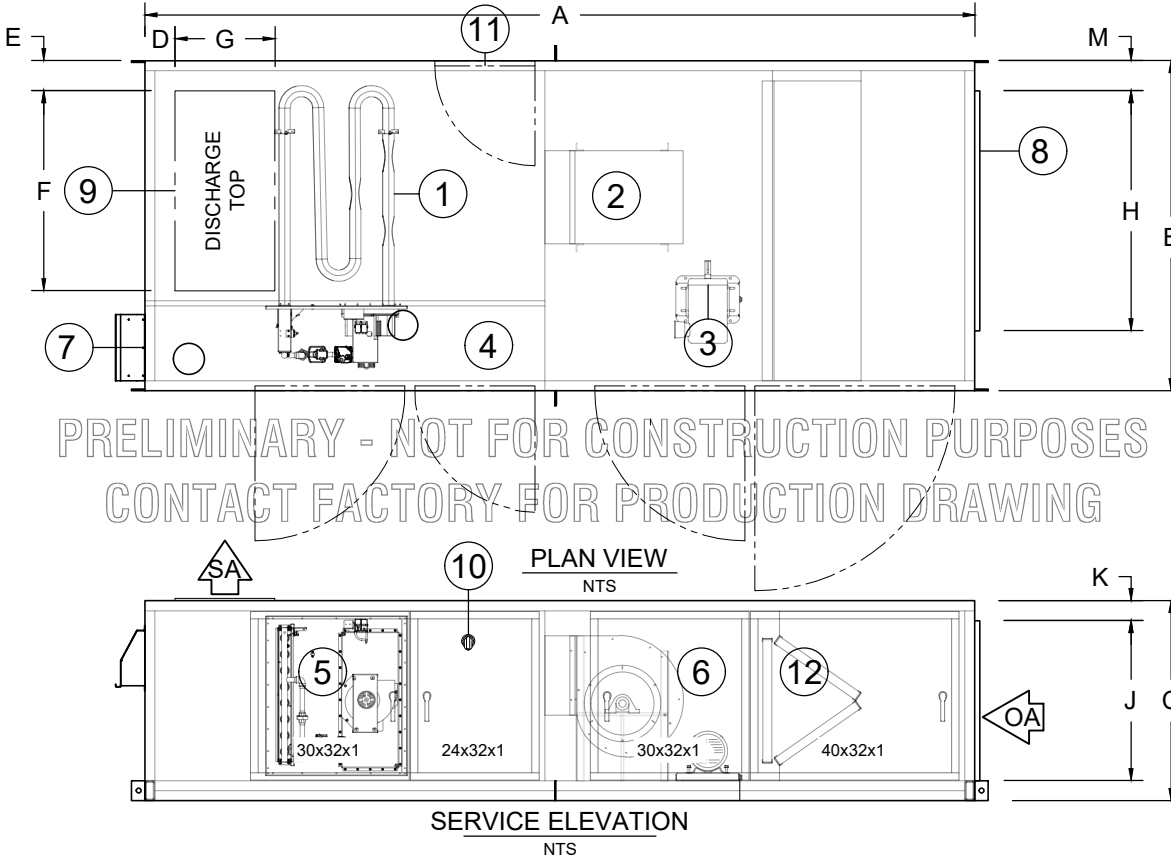

| MODEL      | CFM            | BTU/HR OUTPUT | EST. WEIGHT | A   | B  | C  | D | E | F  | G  | H  | J  | K | M  |
|------------|----------------|---------------|-------------|-----|----|----|---|---|----|----|----|----|---|----|
| TAH-ID0200 | 1,450 - 3,000  | 160,000       | 2200 LBS.   | 140 | 66 | 32 | 6 | 6 | 40 | 16 | 40 | 20 | 4 | 10 |
| TAH-ID0250 | 1,800 - 3,000  | 200,000       | 2200 LBS.   | 140 | 66 | 32 | 6 | 6 | 40 | 16 | 40 | 20 | 4 | 10 |
| TAH-ID0300 | 2,200 - 7,500  | 240,000       | 2650 LBS.   | 150 | 66 | 40 | 6 | 6 | 40 | 20 | 48 | 32 | 4 | 10 |
| TAH-ID0350 | 2,500 - 7,500  | 280,000       | 2650 LBS.   | 150 | 66 | 40 | 6 | 6 | 40 | 20 | 48 | 32 | 4 | 10 |
| TAH-ID0400 | 2,900 - 7,500  | 320,000       | 2650 LBS.   | 150 | 66 | 40 | 6 | 6 | 40 | 20 | 48 | 32 | 4 | 10 |
| TAH-ID0500 | 3,600 - 8,000  | 400,000       | 3190 LBS.   | 178 | 66 | 40 | 6 | 6 | 40 | 20 | 48 | 32 | 4 | 10 |
| TAH-ID0550 | 4,000 - 8,000  | 440,000       | 3190 LBS.   | 178 | 66 | 40 | 6 | 6 | 40 | 20 | 48 | 32 | 4 | 10 |
| TAH-ID0600 | 4,300 - 8,000  | 480,000       | 3190 LBS.   | 178 | 66 | 40 | 6 | 6 | 40 | 20 | 48 | 32 | 4 | 10 |
| TAH-ID0650 | 4,700 - 8,000  | 520,000       | 3190 LBS.   | 178 | 66 | 40 | 6 | 6 | 40 | 20 | 48 | 32 | 4 | 10 |
| TAH-ID0700 | 5,000 - 8,000  | 560,000       | 3190 LBS.   | 178 | 66 | 40 | 6 | 6 | 40 | 20 | 48 | 32 | 4 | 10 |
| TAH-ID0800 | 5,6000 - 8,000 | 640,000       | 3190 LBS.   | 178 | 66 | 40 | 6 | 6 | 40 | 20 | 48 | 32 | 4 | 10 |

| *MODELS ABOVE FEATURE IN-SHOT HEAT EXCHANGERS |                 |                       |            | *MODELS BELOW FEATURE DRUM & TUBE HEAT EXCHANGERS |     |    |   |   |     |    |     |    |   |   |
|---|-----------------|-----------------------|------------|---|-----|----|---|---|-----|----|-----|----|---|---|
| TAH-ID0750                                    | 6,000 - 15,000  | 560,000-760,000       | 4610 LBS.  | 154   | 92  | 52 | 6 | 6 | 64  | 24 | 76  | 44 | 4 | 8 |
| TAH-ID1000                                    | 8,000 - 20,000  | 760,000 - 1,000,000   | 5850 LBS.  | 178   | 106 | 60 | 6 | 6 | 72  | 30 | 96  | 44 | 4 | 3 |
| TAH-ID1250                                    | 9,000 - 20,000  | 1,000,000 - 1,240,000 | 5850 LBS.  | 178   | 106 | 60 | 6 | 6 | 72  | 30 | 96  | 44 | 4 | 3 |
| TAH-ID1500                                    | 11,500 - 30,000 | 1,240,000 - 1,500,000 | 7450 LBS.  | 178   | 140 | 58 | 6 | 6 | 102 | 30 | 120 | 44 | 4 | 6 |
| TAH-ID1750                                    | 14,000 - 30,000 | 1,500,000 - 1,800,000 | 7450 LBS.  | 178   | 140 | 58 | 6 | 6 | 102 | 30 | 120 | 44 | 4 | 6 |
| TAH-ID2000                                    | 16,500 - 35,000 | 1,800,000 - 2,000,000 | 9750 LBS.  | 206   | 164 | 64 | 6 | 6 | 114 | 36 | 150 | 52 | 4 | 6 |
| TAH-ID2500                                    | 18,000 - 35,000 | 2,000,000 - 2,400,000 | 10150 LBS. | 206   | 164 | 64 | 6 | 6 | 114 | 36 | 150 | 52 | 4 | 6 |
| TAH-ID3000                                    | 22,000 - 42,000 | 2,400,000 - 3,000,000 | 12400 LBS. | 252   | 164 | 66 | 6 | 6 | 114 | 36 | 150 | 52 | 4 | 6 |
| TAH-ID4000                                    | 28,000 - 52,000 | 3,000,000 - 4,000,000 | 15000 LBS. | 252   | 204 | 68 | 6 | 8 | 140 | 44 | 200 | 52 | 4 | 2 |







# TAH-ID HRV

[Back to Index](#)

Indirect Fired | 100% Outside Air | MUA

## UNIT COMPONENTS

- |                                   |                                     |  |
|-----------------------------------|-------------------------------------|--|
| 1) INDIRECT-FIRED BURNER          | 5) ACCESS DOOR   ELECTRIC/GAS TRAIN | 9) DISCHARGE                           |
| 2) DWDI FORWARD CURVED BLOWER     | 6) ACCESS DOOR   BLOWER/MOTOR       | 10) TYPICAL DISCONNECT LOCATION        |
| 3) MOTOR AND DRIVES               | 7) TYPICAL GAS INLET LOCATION       | 11) REAR ACCESS DOOR   INDIRECT BURNER |
| 4) VESTIBULE   ELECTRIC/GAS TRAIN | 8) INTAKE                           | 12) ACCESS DOOR   FILTERS              |

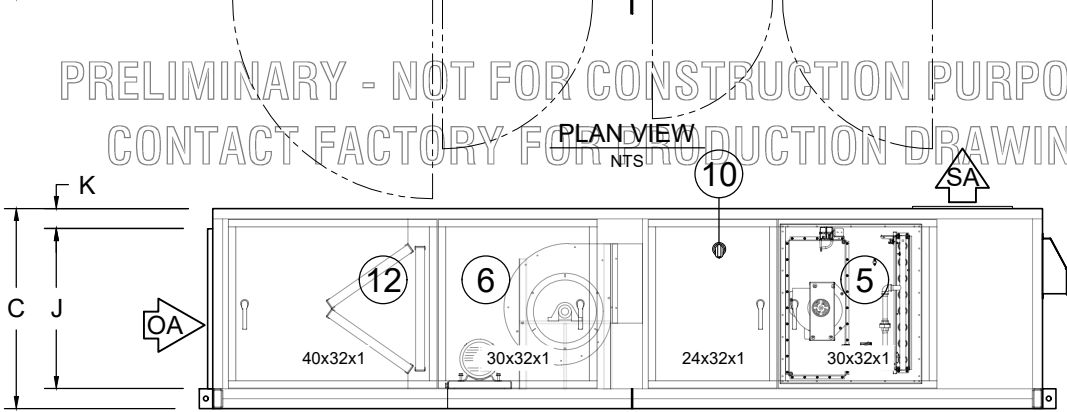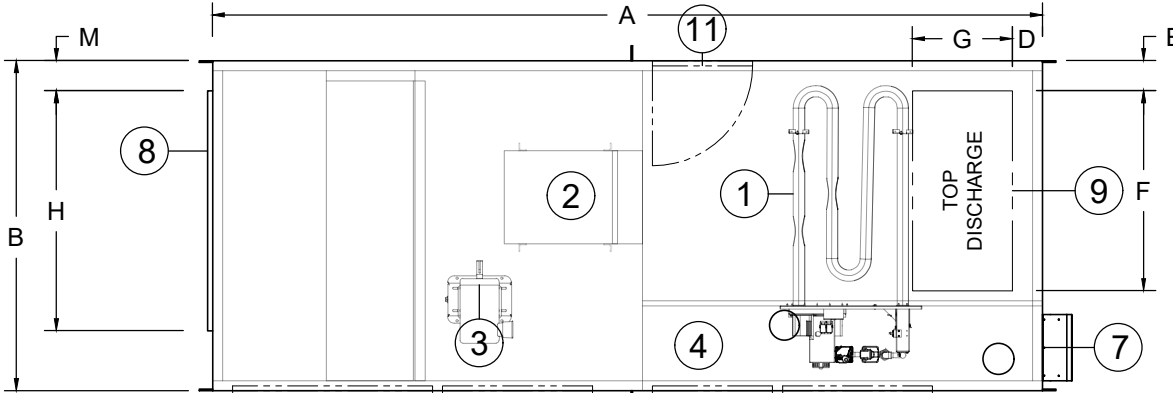

F, G, H & J ARE ACCESSORY DIMENSIONS.  
 D, E, K & M ARE ACCESSORY LOCATIONS.  
 INTAKE AND DISCHARGE ACCESSORIES MAY  
 BE LARGER THAN OPENINGS ON UNIT. ALL  
 DIMENSIONS SUBJECT TO MANUFACTURING  
 TOLERANCES AND SUBJECT TO CHANGE,  
 VERIFY WITH FACTORY BEFORE USING FOR  
 ANY CONSTRUCTION PURPOSES.  
 INDOOR HANGING UNITS MUST UTILIZE A  
 BOTTOM CRADLE (BY OTHERS)

PRELIMINARY - NOT FOR CONSTRUCTION PURPOSES  
 CONTACT FACTORY FOR PRODUCTION DRAWING

| MODEL   | CFM             | BTU/HR OUTPUT         | EST. WEIGHT | A   | B   | C  | D | E | F   | G  | H   | J  | K | M  |
|---|-----------------|-----------------------|-------------|---|-----|----|---|---|-----|----|-----|----|---|----|
| TAH-ID0200                                    | 1,450 - 3,000   | 160,000               | 2200 LBS.   | 140   | 66  | 32 | 6 | 6 | 40  | 16 | 40  | 20 | 4 | 10 |
| TAH-ID0250                                    | 1,800 - 3,000   | 200,000               | 2200 LBS.   | 140   | 66  | 32 | 6 | 6 | 40  | 16 | 40  | 20 | 4 | 10 |
| TAH-ID0300                                    | 2,200 - 7,500   | 240,000               | 2650 LBS.   | 150   | 66  | 40 | 6 | 6 | 40  | 20 | 48  | 32 | 4 | 10 |
| TAH-ID0350                                    | 2,500 - 7,500   | 280,000               | 2650 LBS.   | 150   | 66  | 40 | 6 | 6 | 40  | 20 | 48  | 32 | 4 | 10 |
| TAH-ID0400                                    | 2,900 - 7,500   | 320,000               | 2650 LBS.   | 150   | 66  | 40 | 6 | 6 | 40  | 20 | 48  | 32 | 4 | 10 |
| TAH-ID0500                                    | 3,600 - 8,000   | 400,000               | 3190 LBS.   | 178   | 66  | 40 | 6 | 6 | 40  | 20 | 48  | 32 | 4 | 10 |
| TAH-ID0550                                    | 4,000 - 8,000   | 440,000               | 3190 LBS.   | 178   | 66  | 40 | 6 | 6 | 40  | 20 | 48  | 32 | 4 | 10 |
| TAH-ID0600                                    | 4,300 - 8,000   | 480,000               | 3190 LBS.   | 178   | 66  | 40 | 6 | 6 | 40  | 20 | 48  | 32 | 4 | 10 |
| TAH-ID0650                                    | 4,700 - 8,000   | 520,000               | 3190 LBS.   | 178   | 66  | 40 | 6 | 6 | 40  | 20 | 48  | 32 | 4 | 10 |
| TAH-ID0700                                    | 5,000 - 8,000   | 560,000               | 3190 LBS.   | 178   | 66  | 40 | 6 | 6 | 40  | 20 | 48  | 32 | 4 | 10 |
| TAH-ID0800                                    | 5,6000 - 8,000  | 640,000               | 3190 LBS.   | 178   | 66  | 40 | 6 | 6 | 40  | 20 | 48  | 32 | 4 | 10 |
| *MODELS ABOVE FEATURE IN-SHOT HEAT EXCHANGERS |                 |                       |             | *MODELS BELOW FEATURE DRUM & TUBE HEAT EXCHANGERS |     |    |   |   |     |    |     |    |   |    |
| TAH-ID0750                                    | 6,000 - 15,000  | 560,000-760,000       | 4610 LBS.   | 154   | 92  | 52 | 6 | 6 | 64  | 24 | 76  | 44 | 4 | 8  |
| TAH-ID1000                                    | 8,000 - 20,000  | 760,000 - 1,000,000   | 5850 LBS.   | 178   | 106 | 60 | 6 | 6 | 72  | 30 | 96  | 44 | 4 | 3  |
| TAH-ID1250                                    | 9,000 - 20,000  | 1,000,000 - 1,240,000 | 5850 LBS.   | 178   | 106 | 60 | 6 | 6 | 72  | 30 | 96  | 44 | 4 | 3  |
| TAH-ID1500                                    | 11,500 - 30,000 | 1,240,000 - 1,500,000 | 7450 LBS.   | 178   | 140 | 58 | 6 | 6 | 102 | 30 | 120 | 44 | 4 | 6  |
| TAH-ID1750                                    | 14,000 - 30,000 | 1,500,000 - 1,800,000 | 7450 LBS.   | 178   | 140 | 58 | 6 | 6 | 102 | 30 | 120 | 44 | 4 | 6  |
| TAH-ID2000                                    | 16,500 - 35,000 | 1,800,000 - 2,000,000 | 9750 LBS.   | 206   | 164 | 64 | 6 | 6 | 114 | 36 | 150 | 52 | 4 | 6  |
| TAH-ID2500                                    | 18,000 - 35,000 | 2,000,000 - 2,400,000 | 10150 LBS.  | 206   | 164 | 64 | 6 | 6 | 114 | 36 | 150 | 52 | 4 | 6  |
| TAH-ID3000                                    | 22,000 - 42,000 | 2,400,000 - 3,000,000 | 12400 LBS.  | 252   | 164 | 66 | 6 | 6 | 114 | 36 | 150 | 52 | 4 | 6  |
| TAH-ID4000                                    | 28,000 - 52,000 | 3,000,000 - 4,000,000 | 15000 LBS.  | 252   | 204 | 68 | 6 | 8 | 140 | 44 | 200 | 52 | 4 | 2  |




# TAH-ID HLD, HLH, HLH

Indirect Fired | Recirculating

[Back to Index](#)


### UNIT COMPONENTS

- |                                   |                                     |  |
|-----------------------------------|-------------------------------------|--|
| 1) INDIRECT-FIRED BURNER          | 5) ACCESS DOOR   ELECTRIC/GAS TRAIN | 9) DISCHARGE                           |
| 2) DWDI FORWARD CURVED BLOWER     | 6) ACCESS DOOR   BLOWER/MOTOR       | 10) TYPICAL DISCONNECT LOCATION        |
| 3) MOTOR AND DRIVES               | 7) TYPICAL GAS INLET LOCATION       | 11) REAR ACCESS DOOR   INDIRECT BURNER |
| 4) VESTIBULE   ELECTRIC/GAS TRAIN | 8) INTAKE                           | 12) ACCESS DOOR   FILTERS              |
|                                   |                                     | 13) RETURN AIR                         |

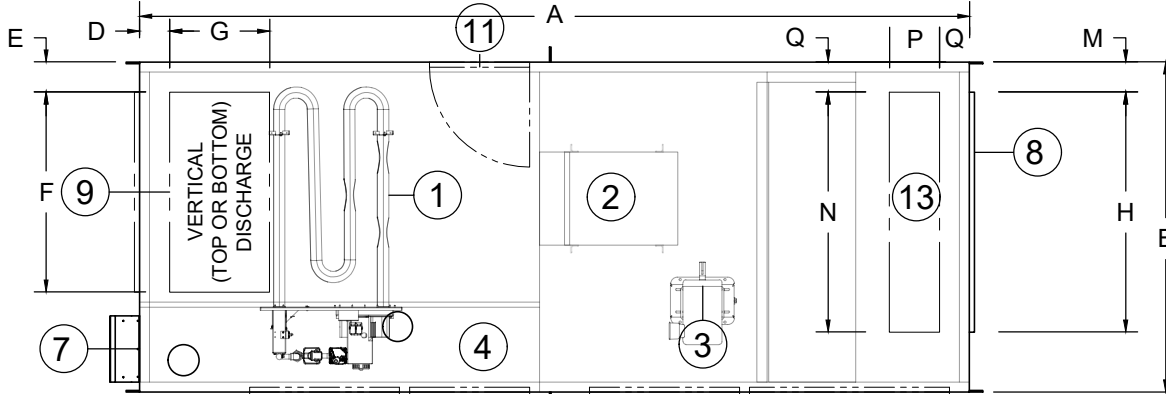

PRELIMINARY - NOT FOR CONSTRUCTION PURPOSES  
CONTACT FACTORY FOR PRODUCTION DRAWING

PLAN VIEW  
NTS

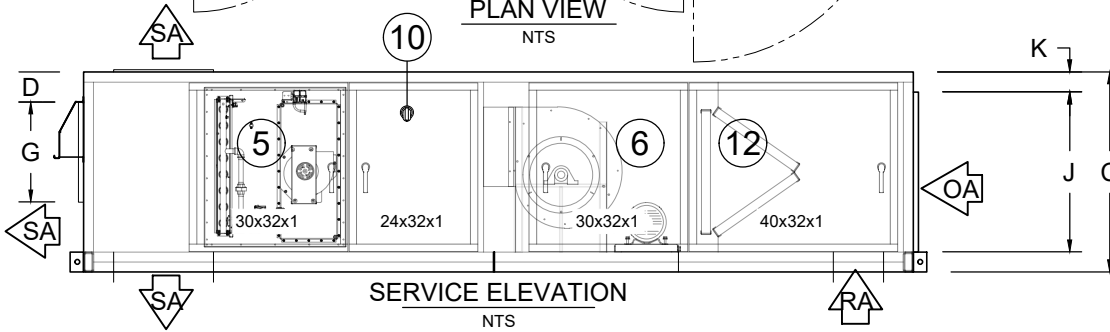

SERVICE ELEVATION  
NTS

F, G, H & J ARE ACCESSORY DIMENSIONS. D, E, K & M ARE ACCESSORY LOCATIONS. INTAKE AND DISCHARGE ACCESSORIES MAY BE LARGER THAN OPENINGS ON UNIT. ALL DIMENSIONS SUBJECT TO MANUFACTURING TOLERANCES AND SUBJECT TO CHANGE, VERIFY WITH FACTORY BEFORE USING FOR ANY CONSTRUCTION PURPOSES. INDOOR HANGING UNITS MUST UTILIZE A BOTTOM CRADLE (BY OTHERS)

| MODEL      | CFM            | BTU/HR OUTPUT | EST. WEIGHT | A   | B  | C  | D | E | F  | G  | H  | J  | K | M | N  | P  | Q |
|------------|----------------|---------------|-------------|-----|----|----|---|---|----|----|----|----|---|---|----|----|---|
| TAH-ID0200 | 1,450 - 3,000  | 160,000       | 2200 LBS.   | 140 | 66 | 32 | 6 | 6 | 25 | 20 | 40 | 20 | 4 | 6 | 40 | 10 | 6 |
| TAH-ID0250 | 1,800 - 3,000  | 200,000       | 2200 LBS.   | 140 | 66 | 32 | 6 | 6 | 25 | 20 | 40 | 20 | 4 | 6 | 40 | 10 | 6 |
| TAH-ID0300 | 2,200 - 7,500  | 240,000       | 2650 LBS.   | 166 | 66 | 40 | 6 | 6 | 32 | 25 | 48 | 32 | 4 | 6 | 48 | 20 | 6 |
| TAH-ID0350 | 2,500 - 7,500  | 280,000       | 2650 LBS.   | 166 | 66 | 40 | 6 | 6 | 32 | 25 | 48 | 32 | 4 | 6 | 48 | 20 | 6 |
| TAH-ID0400 | 2,900 - 7,500  | 320,000       | 2650 LBS.   | 166 | 66 | 40 | 6 | 6 | 32 | 25 | 48 | 32 | 4 | 6 | 48 | 20 | 6 |
| TAH-ID0500 | 3,600 - 8,000  | 400,000       | 3190 LBS.   | 194 | 66 | 40 | 6 | 6 | 32 | 25 | 48 | 32 | 4 | 6 | 48 | 20 | 6 |
| TAH-ID0550 | 4,000 - 8,000  | 440,000       | 3190 LBS.   | 194 | 66 | 40 | 6 | 6 | 32 | 25 | 48 | 32 | 4 | 6 | 48 | 20 | 6 |
| TAH-ID0600 | 4,300 - 8,000  | 480,000       | 3190 LBS.   | 194 | 66 | 40 | 6 | 6 | 32 | 25 | 48 | 32 | 4 | 6 | 48 | 20 | 6 |
| TAH-ID0650 | 4,700 - 8,000  | 520,000       | 3190 LBS.   | 194 | 66 | 40 | 6 | 6 | 32 | 25 | 48 | 32 | 4 | 6 | 48 | 20 | 6 |
| TAH-ID0700 | 5,000 - 8,000  | 560,000       | 3190 LBS.   | 194 | 66 | 40 | 6 | 6 | 32 | 25 | 48 | 32 | 4 | 6 | 48 | 20 | 6 |
| TAH-ID0800 | 5,6000 - 8,000 | 640,000       | 3190 LBS.   | 194 | 66 | 40 | 6 | 6 | 32 | 25 | 48 | 32 | 4 | 6 | 48 | 20 | 6 |

\*MODELS ABOVE FEATURE IN-SHOT HEAT EXCHANGERS

\*MODELS BELOW FEATURE DRUM & TUBE HEAT EXCHANGERS

|             |                 |                       |            |     |     |    |   |   |     |    |     |    |   |   |     |    |   |
|-------------|-----------------|-----------------------|------------|-----|-----|----|---|---|-----|----|-----|----|---|---|-----|----|---|
| TAH-ID0750  | 6,000 - 15,000  | 560,000-760,000       | 4610 LBS.  | 172 | 96  | 52 | 6 | 6 | 64  | 24 | 80  | 44 | 4 | 6 | 80  | 22 | 6 |
| TAH-ID1000  | 8,000 - 20,000  | 760,000 - 1,000,000   | 5850 LBS.  | 194 | 106 | 60 | 6 | 6 | 72  | 28 | 96  | 44 | 4 | 6 | 92  | 26 | 6 |
| TAH-ID1250  | 9,000 - 20,000  | 1,000,000 - 1,240,000 | 5850 LBS.  | 194 | 106 | 60 | 6 | 6 | 72  | 28 | 96  | 44 | 4 | 6 | 92  | 26 | 6 |
| *TAH-ID1500 | 11,500 - 30,000 | 1,240,000 - 1,500,000 | 7450 LBS.  | 200 | 140 | 60 | 6 | 6 | 90  | 36 | 120 | 44 | 4 | 6 | 120 | 30 | 6 |
| *TAH-ID1750 | 14,000 - 30,000 | 1,500,000 - 1,800,000 | 7450 LBS.  | 200 | 140 | 60 | 6 | 6 | 90  | 36 | 120 | 44 | 4 | 6 | 120 | 30 | 6 |
| *TAH-ID2000 | 16,500 - 35,000 | 1,800,000 - 2,000,000 | 9750 LBS.  | 238 | 164 | 64 | 6 | 6 | 90  | 36 | 150 | 52 | 4 | 6 | 150 | 30 | 6 |
| *TAH-ID2500 | 18,000 - 35,000 | 2,000,000 - 2,400,000 | 10150 LBS. | 238 | 164 | 64 | 6 | 6 | 90  | 36 | 150 | 52 | 4 | 6 | 150 | 30 | 6 |
| *TAH-ID3000 | 22,000 - 42,000 | 2,400,000 - 3,000,000 | 12400 LBS. | 300 | 164 | 66 | 6 | 6 | 96  | 42 | 150 | 52 | 4 | 6 | 150 | 34 | 6 |
| *TAH-ID4000 | 28,000 - 52,000 | 3,000,000 - 4,000,000 | 15000 LBS. | 300 | 204 | 68 | 6 | 6 | 108 | 44 | 200 | 52 | 4 | 2 | 190 | 34 | 6 |

\*\* INDICATES A UNIT SPLIT






# TAH-ID HRD, HRH, HRV

Indirect Fired | Recirculating


[Back to Index](#)

## UNIT COMPONENTS

- |                                   |                                     |  |
|-----------------------------------|-------------------------------------|--|
| 1) INDIRECT-FIRED BURNER          | 5) ACCESS DOOR   ELECTRIC/GAS TRAIN | 9) DISCHARGE                           |
| 2) DWDI FORWARD CURVED BLOWER     | 6) ACCESS DOOR   BLOWER/MOTOR       | 10) TYPICAL DISCONNECT LOCATION        |
| 3) MOTOR AND DRIVES               | 7) TYPICAL GAS INLET LOCATION       | 11) REAR ACCESS DOOR   INDIRECT BURNER |
| 4) VESTIBULE   ELECTRIC/GAS TRAIN | 8) INTAKE                           | 12) ACCESS DOOR   FILTERS              |
|                                   |                                     | 13) RETURN AIR                         |

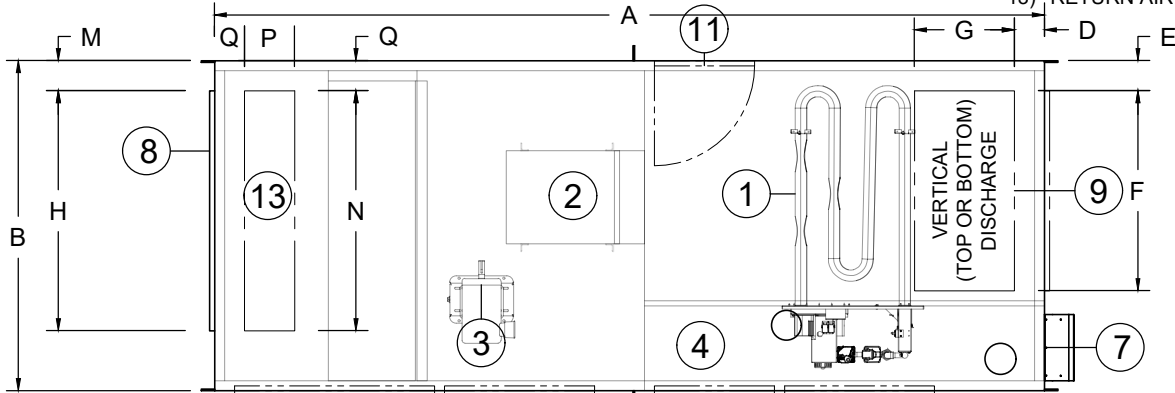

PRELIMINARY - NOT FOR CONSTRUCTION PURPOSES  
CONTACT FACTORY FOR PRODUCTION DRAWING

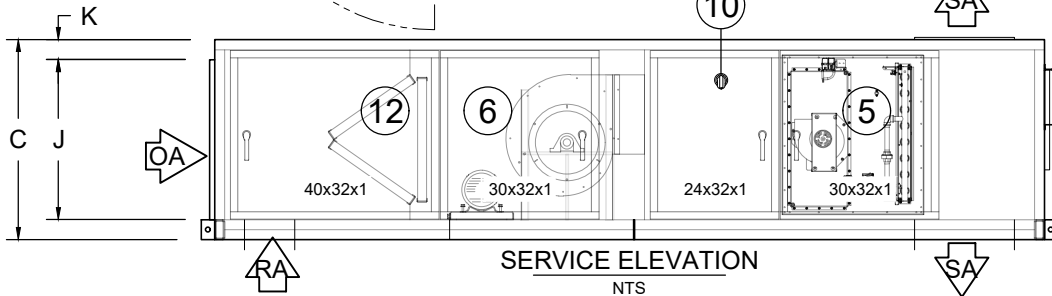

F, G, H & J ARE ACCESSORY DIMENSIONS.  
D, E, K & M ARE ACCESSORY LOCATIONS.  
INTAKE AND DISCHARGE ACCESSORIES MAY  
BE LARGER THAN OPENINGS ON UNIT. ALL  
DIMENSIONS SUBJECT TO MANUFACTURING  
TOLERANCES AND SUBJECT TO CHANGE.  
VERIFY WITH FACTORY BEFORE USING FOR  
ANY CONSTRUCTION PURPOSES.  
INDOOR HANGING UNITS MUST UTILIZE A  
BOTTOM CRADLE (BY OTHERS)

| MODEL      | CFM            | BTU/HR OUTPUT | EST. WEIGHT | A   | B  | C  | D | E | F  | G  | H  | J  | K | M | N  | P  | Q |
|------------|----------------|---------------|-------------|-----|----|----|---|---|----|----|----|----|---|---|----|----|---|
| TAH-ID0200 | 1,450 - 3,000  | 160,000       | 2200 LBS.   | 140 | 66 | 32 | 6 | 6 | 25 | 20 | 40 | 20 | 4 | 6 | 40 | 10 | 6 |
| TAH-ID0250 | 1,800 - 3,000  | 200,000       | 2200 LBS.   | 140 | 66 | 32 | 6 | 6 | 25 | 20 | 40 | 20 | 4 | 6 | 40 | 10 | 6 |
| TAH-ID0300 | 2,200 - 7,500  | 240,000       | 2650 LBS.   | 166 | 66 | 40 | 6 | 6 | 32 | 25 | 48 | 32 | 4 | 6 | 48 | 20 | 6 |
| TAH-ID0350 | 2,500 - 7,500  | 280,000       | 2650 LBS.   | 166 | 66 | 40 | 6 | 6 | 32 | 25 | 48 | 32 | 4 | 6 | 48 | 20 | 6 |
| TAH-ID0400 | 2,900 - 7,500  | 320,000       | 2650 LBS.   | 166 | 66 | 40 | 6 | 6 | 32 | 25 | 48 | 32 | 4 | 6 | 48 | 20 | 6 |
| TAH-ID0500 | 3,600 - 8,000  | 400,000       | 3190 LBS.   | 194 | 66 | 40 | 6 | 6 | 32 | 25 | 48 | 32 | 4 | 6 | 48 | 20 | 6 |
| TAH-ID0550 | 4,000 - 8,000  | 440,000       | 3190 LBS.   | 194 | 66 | 40 | 6 | 6 | 32 | 25 | 48 | 32 | 4 | 6 | 48 | 20 | 6 |
| TAH-ID0600 | 4,300 - 8,000  | 480,000       | 3190 LBS.   | 194 | 66 | 40 | 6 | 6 | 32 | 25 | 48 | 32 | 4 | 6 | 48 | 20 | 6 |
| TAH-ID0650 | 4,700 - 8,000  | 520,000       | 3190 LBS.   | 194 | 66 | 40 | 6 | 6 | 32 | 25 | 48 | 32 | 4 | 6 | 48 | 20 | 6 |
| TAH-ID0700 | 5,000 - 8,000  | 560,000       | 3190 LBS.   | 194 | 66 | 40 | 6 | 6 | 32 | 25 | 48 | 32 | 4 | 6 | 48 | 20 | 6 |
| TAH-ID0800 | 5,6000 - 8,000 | 640,000       | 3190 LBS.   | 194 | 66 | 40 | 6 | 6 | 32 | 25 | 48 | 32 | 4 | 6 | 48 | 20 | 6 |

\*MODELS ABOVE FEATURE IN-SHOT HEAT EXCHANGERS

\*MODELS BELOW FEATURE DRUM & TUBE HEAT EXCHANGERS

|             |                 |                       |            |     |     |    |   |   |     |    |     |    |   |   |     |    |   |
|-------------|-----------------|-----------------------|------------|-----|-----|----|---|---|-----|----|-----|----|---|---|-----|----|---|
| TAH-ID0750  | 6,000 - 15,000  | 560,000-760,000       | 4610 LBS.  | 172 | 96  | 52 | 6 | 6 | 64  | 24 | 80  | 44 | 4 | 6 | 80  | 22 | 6 |
| TAH-ID1000  | 8,000 - 20,000  | 760,000 - 1,000,000   | 5850 LBS.  | 194 | 106 | 60 | 6 | 6 | 72  | 28 | 96  | 44 | 4 | 6 | 92  | 26 | 6 |
| TAH-ID1250  | 9,000 - 20,000  | 1,000,000 - 1,240,000 | 5850 LBS.  | 194 | 106 | 60 | 6 | 6 | 72  | 28 | 96  | 44 | 4 | 6 | 92  | 26 | 6 |
| *TAH-ID1500 | 11,500 - 30,000 | 1,240,000 - 1,500,000 | 7450 LBS.  | 200 | 140 | 60 | 6 | 6 | 90  | 36 | 120 | 44 | 4 | 6 | 120 | 30 | 6 |
| *TAH-ID1750 | 14,000 - 30,000 | 1,500,000 - 1,800,000 | 7450 LBS.  | 200 | 140 | 60 | 6 | 6 | 90  | 36 | 120 | 44 | 4 | 6 | 120 | 30 | 6 |
| *TAH-ID2000 | 16,500 - 35,000 | 1,800,000 - 2,000,000 | 9750 LBS.  | 238 | 164 | 64 | 6 | 6 | 90  | 36 | 150 | 52 | 4 | 6 | 150 | 30 | 6 |
| *TAH-ID2500 | 18,000 - 35,000 | 2,000,000 - 2,400,000 | 10150 LBS. | 238 | 164 | 64 | 6 | 6 | 90  | 36 | 150 | 52 | 4 | 6 | 150 | 30 | 6 |
| *TAH-ID3000 | 22,000 - 42,000 | 2,400,000 - 3,000,000 | 12400 LBS. | 300 | 164 | 66 | 6 | 6 | 96  | 42 | 150 | 52 | 4 | 6 | 150 | 34 | 6 |
| *TAH-ID4000 | 28,000 - 52,000 | 3,000,000 - 4,000,000 | 15000 LBS. | 300 | 204 | 68 | 6 | 6 | 108 | 44 | 200 | 52 | 4 | 2 | 190 | 34 | 6 |

\*\* INDICATES A UNIT SPLIT