


XH Absolute®

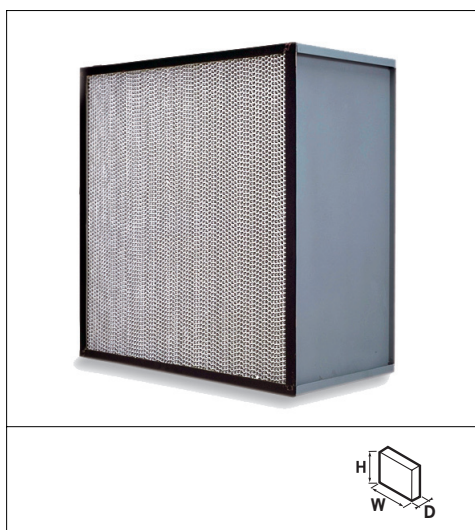

Advantages

- Individually tested high capacity HEPA/ULPA filter in an enclosure assembled without penetrating fasteners
- Unique seamless poured-in-place gasket ensures leak free performance when installed into housings or built-up filter banks

Description: High capacity HEPA/ULPA grade filter in an all metal 16-gauge enclosing frame.

Typical applications: Built-up filter banks, rooftops, and air handlers in medical facilities, pharmaceuticals, and clean process manufacturing.

Efficiency: 99.97% at 0.3µ to 99.9995% at 0.3µ.

Media: Microfine glass media formed into pleats separated by a corrugated aluminum separator.

Recommended final pressure drop: Consult factory. Rule of thumb: change filter when the initial pressure drop doubles.

Temperature: Maximum continuous operating temperature of 175° F (80° C).

Ratings: Tested in accordance with IEST Recommended Practice for Testing HEPA Filter. UL 900.

See Literature 1801XH for more details.

Model Number	Efficiency	IEST Type	Nominal Size (inches)	Airflow Capacity @ 1.35" w.g.	Media Area (sq. ft.)	Shipping Weight (lbs.)
01XH-12Z12Z12- ** -3-C-A-00-0/00	99.97% @ 0.3 µ	H	12 x 12 x 11.50	430	67.5	23.6
01XH-23F11F12- ** -3-C-A-00-0/00	99.97% @ 0.3 µ	H	23.38 x 11.38 x 11.50	850	134.6	30.8
01XH-24Z12Z12- ** -3-C-A-00-0/00	99.97% @ 0.3 µ	H	24 x 12 x 11.50	930	145.5	32.0
01XH-11F23F12- ** -3-C-A-00-0/00	99.97% @ 0.3 µ	H	11.38 x 23.38 x 11.5	850	134.6	34.7
01XH-12Z24Z12- ** -3-C-A-00-0/00	99.97% @ 0.3 µ	H	12 x 24 x 11.50	930	145.5	35.6
01XH-23F23F12- ** -3-C-A-00-0/00	99.97% @ 0.3 µ	H	23.38 x 23.38 x 11.50	1890	287.5	47.5
01XH-24Z24Z12- ** -3-C-A-00-0/00	99.97% @ 0.3 µ	H	24 x 24 x 11.50	2000	301.0	48.5
12XH-12Z12Z12- ** -3-C-A-00-0/00	99.99% @ 0.3 µ	J	12 x 12 x 11.50	430	67.5	23.6
12XH-23F11F12- ** -3-C-A-00-0/00	99.99% @ 0.3 µ	J	23.38 x 11.38 x 11.50	850	134.6	30.8
12XH-24Z12Z12- ** -3-C-A-00-0/00	99.99% @ 0.3 µ	J	24 x 12 x 11.50	930	145.5	32.0
12XH-11F23F12- ** -3-C-A-00-0/00	99.99% @ 0.3 µ	J	11.38 x 23.38 x 11.5	850	134.6	34.7
12XH-12Z24Z12- ** -3-C-A-00-0/00	99.99% @ 0.3 µ	J	12 x 24 x 11.50	930	145.5	35.6
12XH-23F23F12- ** -3-C-A-00-0/00	99.99% @ 0.3 µ	J	23.38 x 23.38 x 11.50	1890	287.5	47.5
12XH-24Z24Z12- ** -3-C-A-00-0/00	99.99% @ 0.3 µ	J	24 x 24 x 11.50	2000	301.0	48.5
13XH-12Z12Z12- ** -3-C-A-00-0/00	99.999% @ 0.3 µ	F	12 x 12 x 11.50	350	67.5	23.6
13XH-23F11F12- ** -3-C-A-00-0/00	99.999% @ 0.3 µ	F	23.38 x 11.38 x 11.50	700	134.6	30.8
13XH-24Z12Z12- ** -3-C-A-00-0/00	99.999% @ 0.3µ	F	24 x 12 x 11.50	770	145.5	32.0
13XH-11F23F12- ** -3-C-A-00-0/00	99.999% @ 0.3 µ	F	11.38 x 23.38 x 11.50	700	134.6	34.7
13XH-12Z24Z12- ** -3-C-A-00-0/00	99.999% @ 0.3 µ	F	12 x 24 x 11.50	770	145.5	35.6
13XH-23F23F12- ** -3-C-A-00-0/00	99.999% @ 0.3 µ	F	23.38 x 23.38 x 11.50	1550	287.5	47.5
13XH-24Z24Z12- ** -3-C-A-00-0/00	99.999% @ 0.3 µ	F	24 x 24 x 11.50	1650	301.0	48.5

Replace ** in model number with 00 for no gasket, 1D for 1 gasket downstream, 1U for one gasket upstream, or 1B for a gasket on both sides.

As part of our program for continuous improvement, Camfil reserves the right to change specifications without notice. 2016-09-09